

The ANT-PAD24-16, a 2.4 GHz flat panel directional antenna, offers high gain in a thin low profile package. The antenna is constructed of gray UV resistant ABS plastic radome with an aluminum backplate. The antenna can be used in horizontal or vertical polarization. The die cast aluminum or galvanized steel bracket affords +/- 45 deg. up or down tilt adjustment and the stainless steel hardware assures a long service life. The ANT-PAD24-16 antenna can be surface mounted or pole mounted and comes with an integral N female connector standard.



702-W / 702M12-W APPLICATIONS

- Wireless LAN applications
- Client antennas
- 802.11b/g applications

SPECIFICATIONS

Frequency Range:	2400-2483 MHz
Gain:	16 dBi
3dB Beam width (H&V):	26 deg.
Front to Back:	27 dB
Cross Polarization:	-20 dB
VSWR:	1.5:1 typical
Impedance:	50 ohms
Input Power:	100 Watts
Operating Temperature:	-40° to 70° C
Pole Size (diameter):	1 to 2 inches
Weight:	1.97 lbs. (0.9kg)
Dimensions (Diameter x Depth):	11" x 11" x 0.8"
	279mm x 279mm x 21mm
Bracket Tilt:	45 deg.
Wind Load:	
Square Inches:	121
100 mph:	30 lbs.
125 mph:	47 lbs.
100 mph with 1/2"radial ice:	32 lbs.

Range Estimates


Throughput	26Mbps	100Mbps
Distance (Miles)	6.9	2.05
Distance (kilometers)	11.15	3.31
TX Power	20dBm	15dBm
Receive Sensitivity	-88dBm	-77dBm
Number of Spatial Streams	1	2

*Given the following parameters:

- Free Space loss / 2-ray ground reflection models
- Antenna is used with an N-TRON 702-W or 702M12-W Ethernet Radio mounted at base level.
- Antenna height: 25ft (7.6 meters) above ground
- Clear line of sight between antennas with no obstructions of the first Fresnel Zone
- 25 feet of N-TRON ANT-CAB-400 series antenna cable for antenna to Radio connection
- 20MHz wide signal
- Center frequency = 2.45GHz
- 10dB loss assumed for weather conditions

Range estimates are theoretical. Actual results may vary based on installation conditions. A site survey should be performed as part of the planning process to determine the presence of RF interference and identify optimum installation locations for access points and antenna installation locations for access points and antennas.

Horizontal and Vertical Antenna Patterns

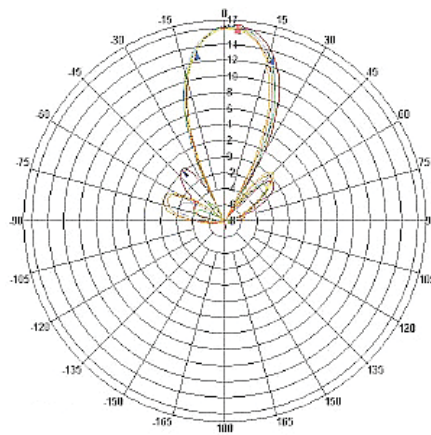

Contact Information

N-TRON Corp.
820 S. University Blvd., Suite 4E
Mobile, AL 36609 USA
TEL: (251) 342-2164
FAX: (251) 342-6353
Website: www.n-tron.com
Email: n-tron_info@n-tron.com

N-TRON Asia
Suite #: 2267, 22/F, One Lujiazui
68 Yin Cheng Road Center,
Pudong New Area
200120 Shanghai, P.R. China
Phone: +86 (0) 21 6194 6777
Fax: +86 (0) 21 6194 6699

N-TRON Europe GmbH
Alte Steinhäuserstr 19
6330 Cham / Zg Switzerland
TEL: +41 41 7406636
FAX: +41 41 7406637

REV 100419