


The *ANT-PAD58-19*, a 5.8 GHz flat panel directional antenna, offers high gain in a thin low profile package. The antenna is constructed of gray UV resistant ABS plastic radome with an aluminum backplate. The antenna can be used in horizontal or vertical polarization. The die cast aluminum or galvanized steel bracket affords +/- 45 deg. up or down tilt adjustment and the stainless steel hardware assures a long service life. The *ANT-PAD58-19* antenna can be surface mounted or pole mounted and comes with an integral N female connector standard.

## 702-W / 702M12-W APPLICATIONS

- Wireless 5GHz LAN applications
- Client Antennas
- 802.11abg applications

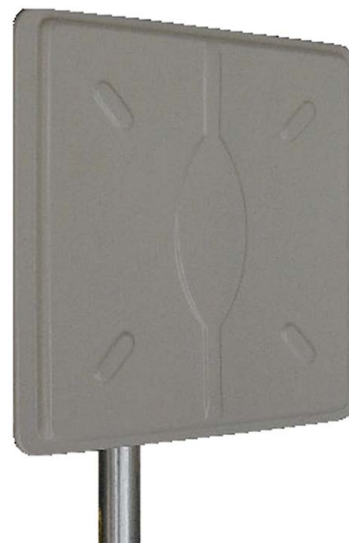

## SPECIFICATIONS

Frequency Range:	5150 - 5825 MHz
Gain:	19 dBi
Beam width (H&V):	16 deg.
Front to Back:	30 dB
Cross Polarization:	25 dB
VSWR 5150-5350MHz:	2.0:1
VSWR 5470-5825MHz:	1.5:1
Impedance:	50 ohms
Input Power:	100 Watts
Operating Temperature:	-40° to 70° C
Pole Size (diameter):	1 to 2.5 inches
Weight:	1.10 lbs. (0.5kg)
Dimensions (Diameter x Depth):	7.5" x 7.5" x 0.8" 190mm x 190mm x 21mm
Bracket Tilt:	45 deg.

## Range Estimates


Throughput	26Mbps	100Mbps
Distance (Miles)	7.7	1.2
Distance (kilometers)	12.41	1.96
TX Power	20dBm	15dBm
Receive Sensitivity	-87dBm	-76dBm
Number of Spatial Streams	1	2

\*Given the following parameters:

- Free Space loss / 2-ray ground reflection models
- Antenna is used with an *N-TRON 702-W* or *702M12-W* Ethernet Radio mounted at base level.
- Antenna height: 25ft (7.6 meters) above ground
- Clear line of sight between antennas with no obstructions of the first Fresnel Zone
- 25 feet of *N-TRON ANT-CAB-400* series antenna cable for antenna to Radio connection
- 20MHz wide signal
- Center frequency = 5.80GHz
- 10dB loss assumed for weather conditions

Range estimates are theoretical. Actual results may vary based on installation conditions. A site survey should be performed as part of the planning process to determine the presence of RF interference and identify optimum installation locations for access points and antennas.

Antenna Pattern

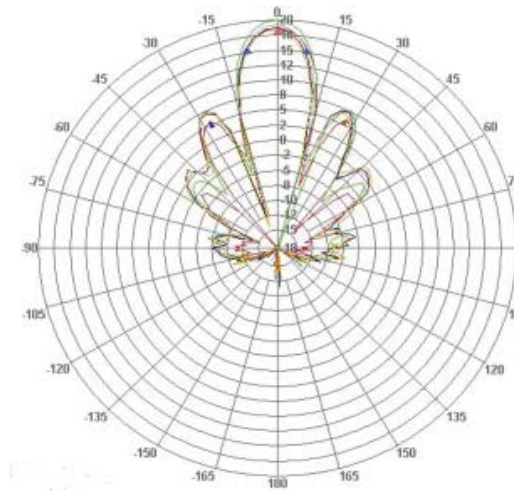

## Contact Information

N-TRON Corp.  
820 S. University Blvd., Suite 4E  
Mobile, AL 36609 USA  
TEL: (251) 342-2164  
FAX: (251) 342-6353  
Website: [www.n-tron.com](http://www.n-tron.com)  
Email: [n-tron\\_info@n-tron.com](mailto:n-tron_info@n-tron.com)

N-TRON Asia  
Suite #: 2267, 22/F, One Lujiazui  
68 Yin Cheng Road Center,  
Pudong New Area  
200120 Shanghai, P.R. China  
Phone: +86 (0) 21 6194 6777  
Fax: +86 (0) 21 6194 6699

N-TRON Europe GmbH  
Alte Steinhäuserstr 19  
6330 Cham / Zg Switzerland  
TEL: +41 41 7406636  
FAX: +41 41 7406637

REV 100419